

BEH-5160 Series

Outdoor Camera Housing



* Shown above w/ Camera (not included).
Optional Wiper shown.

The BEH-5160 Series camera housings offer an extra-large equipment bay, a full feature set, and installer friendly design. Side-opening access to the camera bay simplifies installation and camera servicing without disrupting the camera's field of view. 24VAC or PoE+ input voltages power the heater, blower, and camera.

The housing's glass viewing window for optical clarity and optional PoE splitter for powering the housing with a single network cable make this housing an ideal enclosure for high-Megapixel IP cameras. Cable entry is achieved through the base of the housing. The optional feed-through mount conceals the power/data cables.

Features



- Outdoor Rated IP66
- Power Options: 24VAC, PoE+ (802.3at)
- IP-Camera-Ready with Glass Viewing Window for Optical Clarity
- Installer-Friendly Side-Opening Design
- Sunshield, Heater and Blower Options
- Feed-Through Mount Accessory

Models:

BEH-5160-2SHB	Housing, 24V Heater, Blower, w/ Sunshield
BEH-5160-PSHB	Housing, PoE, Heater, Blower, w/ Sunshield
BWM-5160	Wall Mount for BEH-5160 Series

Specifications:

Environment	Indoor / Outdoor
Housing Type	Side Opening
IP Rating	IP66
Sunshield	Included
Cable Entry	1 x Liquid-Tight Fitting 1 x 3-Cable Sealing Grommet
Cable Management Bracket	Sold Separately (Part Number BWM-5011)
Input Voltage	-2 Version: 24VAC \pm 10% -P Version: PoE (802.3at)
Power Consumption	-2 Version: 20W Max (Heater/Blower) -P Version: 25.5W Max (System)
Construction	Aluminum with UV Protected Powder Coat Paint, Gray
Overall Dimensions	18.1" x 6.8" x 6.1" (L x W x H)
Max Cam/Lens Length	11.5 inches (294mm)

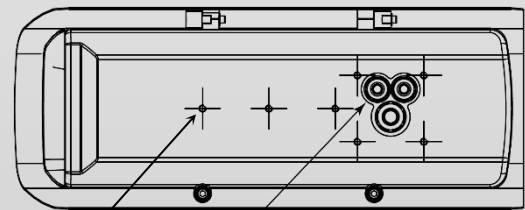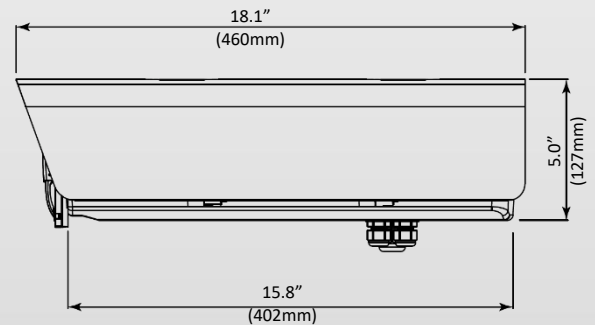

7 x 1/4-20 Threaded Mounting Holes
2 x 3/8" NPT
1 x 1/2" NPT Cordgrips

