


BNH-5140 Series

Outdoor Camera Housing







*Shown Above w/ Camera (Not Included)

Models:

BNH-5140-2SHB	Housing, 24V Heater, Blower, w/ Sunshield
BNH-5140-PSHB	Housing, PoE, Heater, Blower, w/ Sunshield
BWM-5011	Wall Mount for BNH Series Housings

Specifications:

Environment	Indoor / Outdoor
Housing Type	Side Opening
IP Rating	IP66
Sunshield	Included
Cable Entry	1 x Liquid-Tight Fitting 1 x 3-Cable Sealing Grommet
Cable Management Bracket	Sold Separately (Part Number BWM-5011)
Input Voltage	-2 Version: 24VAC ±10% -P Version: PoE (802.3at)
Power Consumption	-2 Version: 20W Max (Heater/Blower) -P Version: 25.5W Max (System)
Construction	Aluminum with UV Protected Powder Coat Paint, Gray
Overall Dimensions	17" x 6.5" x 5.4" (L x W x H)
Max Cam/Lens Length	10.5 inches (267mm)

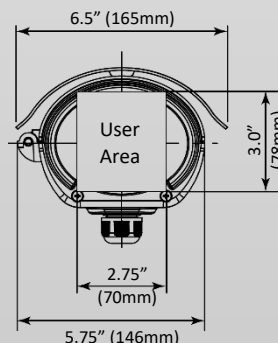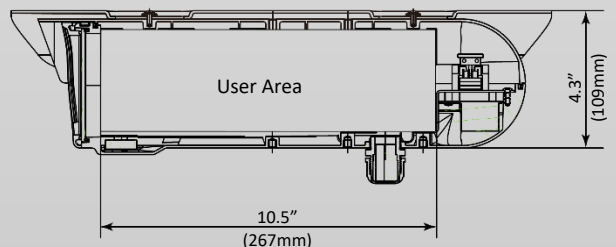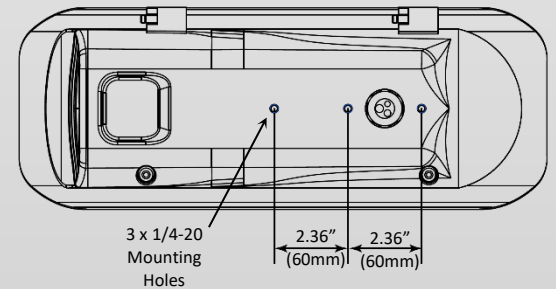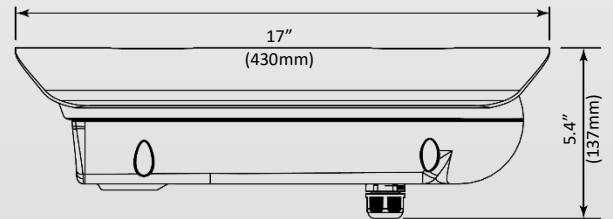

The BNH-5140 Series outdoor camera housings are full featured and installer friendly. Side-opening access to the camera bay simplifies installation and camera servicing without disrupting the camera's field of view. 24VAC or PoE+ input voltages power the heater, blower, and camera.

The housing's glass viewing window for optical clarity and optional PoE splitter for powering the housing with a single network cable make this housing an ideal enclosure for high-Megapixel IP cameras. Cable entry is achieved through the base of the housing. The optional feed-through mount conceals the power/data cables.

Features

- Outdoor Rated IP66
- Power Options: 24VAC, PoE+ (802.3at)
- IP-Camera-Ready with Glass Viewing Window for Optical Clarity
- Installer-Friendly Side-Opening Design
- Sunshield, Heater and Blower Options
- Feed-Through Mount Accessory

All specifications are subject to change without notice.

© BroadSight Systems, Inc. All Rights Reserved. 09/20